

Gigaset pro

Gigaset N870 IP PRO

The scalable DECT IP multicell system for seamless mobile communication in SMB and beyond.

The Gigaset N870 Multicell System is an innovative breakthrough solution that combines base DECT base station and call manager to create a highly scalable yet reliable solution for organisations that need guaranteed mobile communication across sites of any shape or size. Each zone supports up to 250 handsets and 60 simultaneous calls making it ideal for small and medium organisations. For those companies which go beyond the SMB level, widen the network with multiple zones up to the level of an Enterprise, where seamless handover and roaming is applicable in and between all zones. With seamless connectivity with leading IP based on-premise and cloud telephony services, HD audio quality, seamless handover and roaming, the Gigaset N870 Multicell System provides complete coverage across even the most challenging sites. Simple deployment with absolute reliability is key.



UP TO 250
HANDSETS IN
ONE DOMAIN

UP TO 60 SIMUL-
TANEOUS CALLS IN
ONE DOMAIN

MULTICELL
SOLUTION UP TO
60 BASE STATIONS

REDUNCANCY
AND SRTP/TLS
SECURITY

LDAPS AND
CLOUD BOOKS

ZERO-TOUCH
AUTO-
PROVISIONING

REMOTE
MANAGEMENT

HD
VOICE

WALL
MOUNTABLE

GIGASET
SOFTWARE
PLATFORM

Feature highlights:

- One hardware concept, settings define function
- Each single Multicell installation on one building supports:
 - Up to 250 users / SIP accounts / handsets
 - Up to 60 base stations
 - Up to 60 parallel calls
 - Up to 10 simultaneous calls per base
- Gigaset Integrator combines multiple N870 Multicell zones to one large handover and roaming domain
- Seamless handover and roaming
- LDAP(S) phonebook
- Professional zero-touch auto-provisioning setup
- IPUI based handset registration
- uaCSTA support for CTI-integration
- xhtml applications by customer
- End-to-end call and data encryption
- LEDs on front for status and visual power check

DECT technology with full security

DECT Technology is secure because its digital and encrypted. Eavesdropping on a conversation is not possible wirelessly. In the N870IP System, SIP Security is added to the security of the network. End to end security is now ensured. Security includes SRTP/TLS, LDAPS and HTTPS.

Scalable and future-proof

The N870 Multicell System is an expandable solution for any organisation. Start small and expand later when your business is requesting more users. The N870IP can support so called S, M, L, XL and XXL environments. L to XXL make use of the Gigaset Integrator, which integrates different locations, buildings or even floors into one large communication network.

Connectivity and provisioning

The N870IP Multicell System is interoperable with many platform and network providers. Deep integration on platforms applies to eg. Broadsoft and Asterisk. Providers to support the N870 right from the start are eg. Starface, Bintec-Elmeg, NFON and Swyx. All recent professional handsets from Gigaset are compatible with the N870 System and integrate smoothly. A full and actual list from platforms, providers and handset compatibility can be found on our wiki.

Easy setup and configuration.

Administrators benefit from zero touch provisioning. The intuitive web based interface with online help, XML based configuration files, provider profiles and support of standard protocols make configuration extremely easy and fast. The Gigaset N720 SPK (Site Planning Kit) support the reseller to identify the right position for any of the N870 base stations.



BECAUSE IT'S YOUR BUSINESS.

Gigaset N870

The scalable DECT IP multicell system for seamless mobile communication in SMB and beyond.

Technical data:

Phonebook and dialling

- Link to an external LDAP phonebooks (up to 10)
- Search function and reverse lookup online
- vCard support
- Name indication for incoming calls, outgoing calls, missed call list, redial list
- Barring of calls (black list)
- DTMF (SIP Info / RFC 2833, in-band)
- Multinational call progress tones (provisionable)
- CLIP, CNIP: Name indication for incoming calls, outgoing calls, missed call list, redial list
- Name replacement from local phonebook and online directories (auto lookup)
- List of up to 50 calls (missed, received, dialled)
- SIP MWI (Message Waiting Indicator) signalling for voice mail

Software

- Easy configuration via web browser
- Administrator friendly configuration via configuration file
- User specific Auto-provisioning:
 - via MAC address
 - via XML configuration file
- Firmware upgrade / downgrade
- Backup and restore functions
- Log to external syslog servers

Hardware

- Wall- or ceiling mountable
- Antenna diversity
- 2 Status LEDs
- Reset key
- Ethernet RJ45 10/100 Mbps
- Power over Ethernet
- N870 PRO: PoE IEEE 802.3af class 1
- Power saving switch mode power supply (EU or UK)⁴
- Colour: polar white SF9063
- Dimension: 190 mm (H) x 110 mm (W) x 42 mm (D)
- Two-year warranty

Special features

- up to 250 accounts (1 for each user)
- MWI signalling configurable
- Failover: DNS SRV, Failover server
- Sync over DECT, Sync over LAN or Mixed mode
- Connect DECT sync/a-sync state with SIP registration. (Handset off or out of range / de-register SIP)
- IPUI Provisioning
- xHTML Applications
- uaCSTA
- local 3-Way Conference

⁴ Available as accessory

Connectivity

Small


Embedded INT + DM function = on,
Base function = on

Medium

Embedded INT + DM function = on,
Base function = off

Large - XXL⁵

Separate INT + DM function = on,
Base function = off

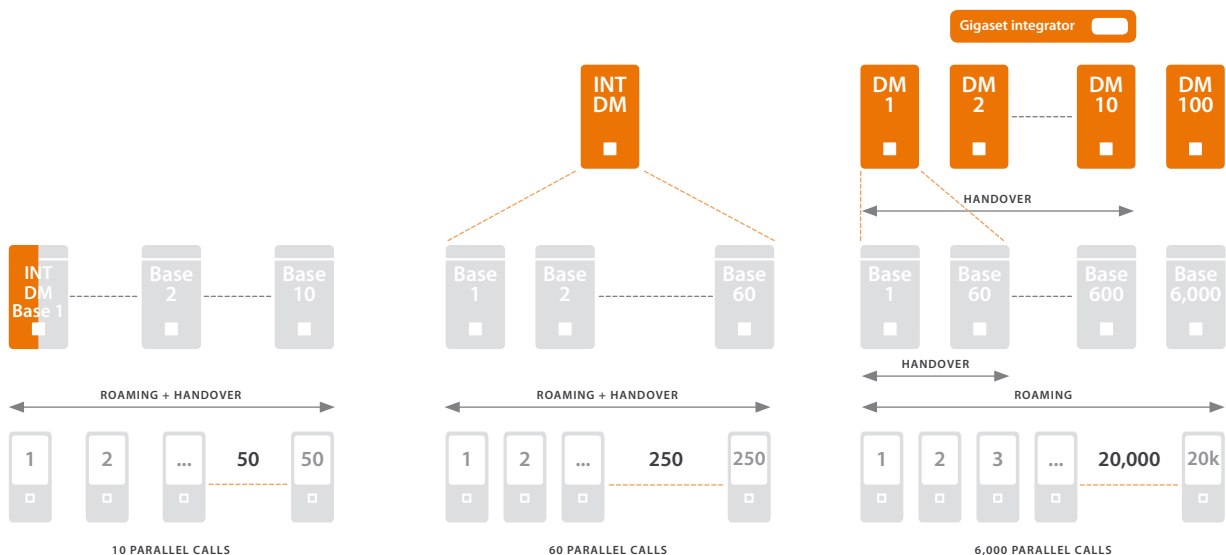

www.internetvoipphone.co.uk | sales@internetvoipphone.co.uk | 0333 014 4343

One Hardware for all functions: N870IP appliance. Function is set in the device settings: Integrator, DECT Manager and/or Base station.

⁵ In preparation, available at a later point in time

Service

- Syslog
- PCAP tracing
- SNMPv3
- CLI - Command Line Interface for specific service cases
- Save and Restore
- Base station remote reset by power procedure
- Firmware update from server, file based, scheduled, automatically updating all base stations
- Virtualisation Tool

Gigaset Integrator¹

- Software / VMWare to integrate multiple N870IP Multicell Systems
- Combines N870 devices with DECT manager activated
- Ensures handover and roaming between all DECT Managers
- Combine any Small and Medium sized installation to a Large, Extra Large or even an Extra Extra Large configuration. So infact serving the market from a SOHO, SME to Large Enterprises.
- Details on the complete system in total:
 - Up to 20,000 users / SIP accounts / handsets
 - Up to 6,000 base stations
 - Up to 6,000 parallel calls

Technical specifications

- DECT EN 300 175-x
- Standards: GAP / CAT-iq 1.0
- DECT radio coverage up to 50 m (indoor) and 300 m (outdoor)
- Support of 120 DECT channels
- TLS1.0/1.1/1.2 for HTTPS and SIP, SIPS
- SIP (RFC3261, RFC2396, RFC2976)
- HTTP/Digest Authentication (RFC2617)
- Locating SIP Server (RFC3263)
- Call Transfer (RFC5589, RFC3515, RFC3891, RFC3892)
- MWI (RFC3265, RFC3842)
- SDP (RFC4566, RFC3264, RFC3555)
- RTP (RFC3550, RFC3551, RFC3555, RFC2833), SRTP, RTCP
- IPv4, IPv6², SNMP, DHCP (Option 1, 3, 6, 12, 15, 28, 42, 114, 120), DNS, TCP, UDP, VLAN (IEEE 802.1q)
- DNS SRV
- 10 simultaneous calls per base (G.711), 8 simultaneous calls per base (G.729ab codec) up to 5 calls with wideband audio (G.722)

- Codecs G.711, G.722, G.729ab
- VAD/CNG (for G.729ab)
- QoS (RFC2474, RFC2475)
- Approvals: CE

Platform features

The N870 system supports many platforms, incl. Broadsoft and Asterisk. Visit the wiki for the latest overview and status.

General Platform features include:

- Network AM
- Call transfer: attended, semi-attended, blind
- Call waiting
- Call hold/toggle/resume
- Call reject
- CLIR
- Call forwarding: CFU, CFNR, CFB
- Distinctive Ring (Internal/External)
- Auto-provisioning
- Net directories via LDAP
- Group Pick-up

Dimensions and weight

Packaging

- Dimension (l x w x h), 248 x 186 x 64 mm
- Weight approx.: 363 g

Device

- Colour of the Housing, Light Grey
- Dimensions (l x w x h), 182.3 x 113.1 x 42.2 mm
- Weight approx.: 247 gram

Environmental conditions

- Protection class IP20 (indoor)
- Operating temp: +5° to +45° C
- Storage temp: -20° to +70° C
- Relative Humidity: 20 % - 75 % non-condensation

Box contents

- Main device
- Security leaflet
- Screws

¹ Contact the local Gigaset Team for more information or visit the wiki.

² Available in later stage via software update. Visit the wiki for more information.

Gigaset pro

Gigaset N870 Multicell System components

Gigaset N870IP PRO

One Hardware concept, usable in different modes:

- Up to 6,000 N870 appliances in base station mode
- Up to 100 N870 appliances in DECT manager mode

Order number: S30852-S2716-R101

Gigaset Integrator³

- Virtual Integrator for VMWare®
- License based model

³ Contact the local Gigaset Team for more information or visit the wiki.

Gigaset N720 SPK PRO⁶

- This Site Planning Kit is recommended for the multicell site analysis and planning. The kit includes two calibrated handsets (Gigaset S650H) and one Gigaset N720 SPK PRO base station.

- Measurement of RSSI values

Order number: S30852-H2316-R101

Power supplies

- Optional, if no PoE/PoE injector available
- EU: Order Nr. C39280-Z4-C706
- UK: Order Nr. C39280-Z4-C745

⁶ Equally usable for N870 & N720 measurements

Compatible DECT Endpoints from the Professional Series



S650H

- Comfort-edition
- Navi-key operation
- HD Audio and HD Voice
- Handsfree
- Auto-provisioning via IPUI
- Talktime 12h, standby 300h
- Resistant to scratches / disinfectants



R650H

- Active-edition
- IP65; shock, dust and water jets resistant
- Large TFT display
- Rubber surface
- Auto-provisioning via IPUI
- Talktime 14h, standby 320h



SL750H

- Micro-edition
- Large TFT 2.4" Display
- Bluetooth
- Resistant to scratches / disinfectants
- Auto-provisioning via IPUI
- Talktime 12h, standby 250h



Maxwell C

- DECT, as a handset
- Large TFT 2.8" Display
- 8 direct dial keys
- Bluetooth and wired handset connection
- Auto-provisioning via IPUI
- Netadapter powered

It's your best choice.

Gigaset's new professional line provides businesses with tailor-made, communication-enhancing phone systems.

Discover more! Contact your Gigaset representative, visit gigasetpro.com or the wiki at wiki.gigasetpro.com

www.internetvoipphone.co.uk | sales@internetvoipphone.co.uk | 0333 014 4343