

Yealink

CP-960

HD IP Conference Phone

Optimal HD audio, fully duplex

5-inch multi-touchscreen

Noise Proof Technology

20 foot range & 360 degree voice pickup

Built-in 3 microphone array

5 way conference

Yealink Pentagon Meeting Room

Built-in in WiFi/Bluetooth

Based on Android 5.1 operating system

PC connection via USB Micro-B port

Optional expansion microphones



Wireless
microphone



Pairing via USB



Pairing via
Bluetooth



Call
recording



Yealink Pentagon
Meeting Room



External loudspeaker
connection

HD IP Conferencing for Medium to Large Meeting Rooms

The Yealink Optima HD IP conference phone powered by the Android 5.1 operating system boasts a user-centric design and 5-inch multi-touchscreen. Combining simplicity of use with sophisticated features, the CP960 is the perfect conferencing unit for your teams and is ideal for medium to large conference rooms.

The crystal-clear audio quality ensures your conversations sound natural and bright anywhere. With built-in wifi and wired pairing to smartphones or PC/tablet via Bluetooth and Micro-B port, the CP960 is accessible to all.

The Yealink CP960 conference phone strikes the perfect balance between ease-of-use and powerful feature, delivering a smarter audio conferencing solution for your company.

Yealink

CP-960

CP-960 Accessories

CPW-90 Wireless Microphone



Audio Features

- > Optimal HD audio
- > 20-foot (6-meter) microphone pickup range
- > Apply to medium to large conference room
- > Built-in 3-microphone array, 360-degree voice pickup
- > 56mm diameter and 10w speaker
- > Full-duplex speakerphone with AEC
- > Echo cancellation tail length is up to 320ms
- > Background noise suppression
- > Codecs: G722, G722.1C, G726, G729, G723, iLBC, Opus
- > DTMF: In-band, Out-of-band (RFC 2833) and SIP INFO
- > VAD, CNG, PLC, AJB, AGC

Phone Features

- > 1 VoIP account
- > Call hold, mute, DND, call recording, hotline
- > 5-way conference call
- > Redial, call waiting, emergency call
- > Call forward, call transfer, call return, dial plan
- > Ring tone selection/import/delete
- > Set date time manually or automatically
- > Volume adjustment
- > Pairing via Bluetooth/USB Micro-B port
- > External speaker connection via 3.5mm audio-out port
- > Create meeting directly
- > Join meeting seamlessly
- > Active Speaker

Directory

- > Local phonebook up to 1000 entries
- > XML/LDAP remote phonebook
- > Intelligent search method
- > Phonebook search/import/export
- > Call history: dialed/received/missed/forwarded
- > Black list

IP PBX Features

- > Intercom
- > Multicast paging
- > Anonymous call
- > Anonymous call rejection
- > Voice mail
- > Distinctive ringtone
- > Call pickup

Display

- > 5" 720x1280 capacitive touch screen
- > Volume key
- > Home button

Interface

- > 1 x RJ45 10/100M Ethernet port
- > Power over Ethernet (IEEE 802.3af), class 4
- > 2 x Wired MIC port
- > 2 x USB 2.0 port
- > 1 x 3.5mm audio-out port
- > 1 x USB 2.0 Micro-B device port
- > 1 x Security slot

Network and Security

- > SIP v1 (RFC2543), v2 (RFC3261)
- > SIP server redundancy supported
- > IPv4/IPv6
- > NAT traversal: STUN mode
- > Proxy mode and peer-to-peer SIP link mode
- > IP assignment: static/DHCP
- > HTTP/HTTPS web server
- > Time and date synchronization using SNTP
- > UDP/TCP/DNS-SRV (RFC 3263)
- > QoS: 802.1p/Q tagging (VLAN), Layer 3 ToS, DSCP
- > SRTP for voice encryption
- > Transport Layer Security (TLS)
- > HTTPS certificate manager
- > AES encryption for configuration file
- > Digest authentication using MD5/MD5-sess
- > OpenVPN, IEEE802.1X

Management

- > Configuration: browser/phone/auto-provision
- > Auto provision via FTP/TFTP/HTTP/HTTPS for mass deploy
- > Auto-provision with PnP
- > Zero-sp-touch, TR-069, SNMP
- > Reset to factory, reboot
- > Package tracing export, system log

Other Physical Features

- > External Yealink PoE adapter (optional)
- > Power consumption (PoE): 5.25w-12.3w
- > Dimension (W*D*H): 338mm*338mm*74mm
- > Operating humidity: 10~90%
- > Storage temperature: -10~40°C (+14~104°F)

Package Features

- > Package content:
 - Yealink CP960 IP conference phone
 - Ethernet Cable (7.5m CAT5E UTP cable)
 - Wireless Microphone CPW90 (Optional)
 - Quick Start Guide
 - Yealink PoE Adapter YLPOE30 (Optional)
- > Qty/CTN: 4 PCS
- > N.W/CTN: 5.6 kg (CP960) 10.4 kg (CP960-WirelessMic)
- > G.W/CTN: 8.4 kg (CP960) 11.6 kg (CP960-WirelessMic)
- > Giftbox size: 405mm*392mm*141mm
- > Carton Meas: 589mm*401mm*421mm

Package Features

- > N.W/CTN: 6.6 kg
- > G.W/CTN: 7.8 kg
- > Giftbox size: 405mm x 392mm x 141mm

Certifications




WEEE Compliant



ROHS Compliant



Hearing Aid Compatible

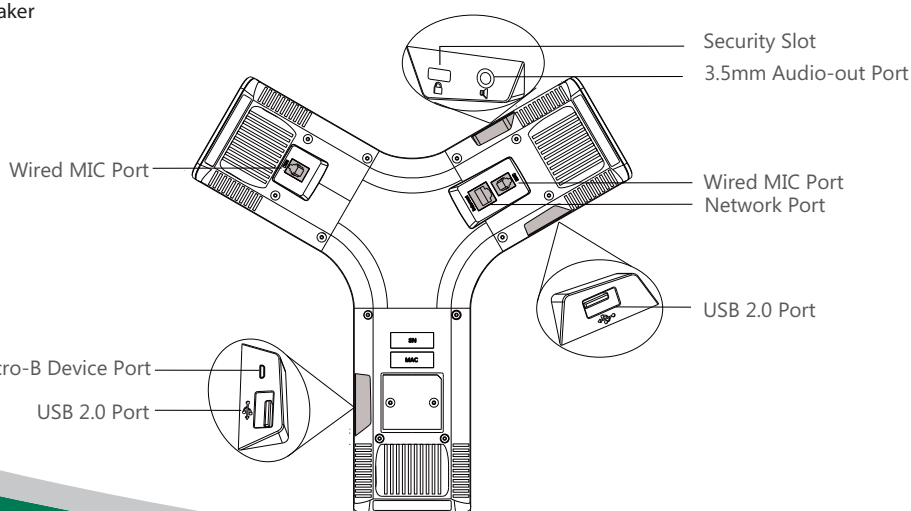

Yealink

www.internetvoipphone.co.uk | sales@internetvoipphone.co.uk | 0333 014 4343

Yealink (UK) Ltd, Pennine House, Salford Street, Bury, Lancashire, BL9 6YA, United Kingdom

Tel: +44 (0)161 763 2060 Email: sales@yealink.co.uk Web: www.yealink.co.uk